


# HUS

## Pneumatic double-piston rotary actuators

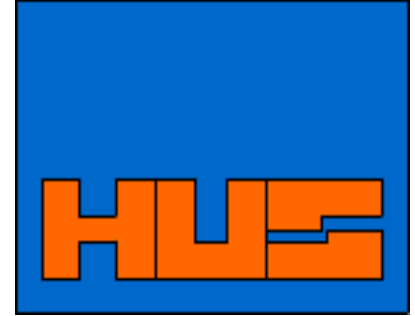

TD-0.530-A2-08.03

09/09/2020

Type series: **DKSM** 90°- standard version

Product group: **530**

### Performance table / air consumption / weight

90°- standard version

Type	Size	Power Nm/bar	Power in Nm at control pressure				Md max	Air consumption NL / switch	Weight kg / pc.
			3 bar	4 bar	5 bar	6 bar			
DKSM 063 -F05		5	15	20	25	30	50	0.20	4.20
DKSM 063 FR-F05				7	8,75	10,50		0.20	4.50
DKSM 080-F05		10	30	40	50	60	100	0.35	6.30
DKSM 080 FR-F05				14	17,50	21		0.35	7.10
DKSM 100-F07		20	60	80	100	120	200	0.60	11.80
DKSM 100 FR-F07				28	35	42		0.65	14.20
DKSM 125-F07		40	120	160	200	240	300	1,10	20.30
DKSM 125 FR-F07				59	74	88		1.20	22.50
DKSM 160-F10		85	255	340	425	510	600	2.90	37.90
DKSM 160 FR-F10			94	125	157	188		3.10	42.10
DKSM 200-F12		170	510	680	850	1020	1500	6.00	70.00
DKSM 200 FR-F12			188	251	314	377		6.50	76.30

Permissible control pressure **DKSM 60 to DKSM 200 = 10 bar** (up to 16 bar possible)

Air consumption: **Standard values for system planning**

Weight: **Unit weight DKSM 90°- stainless steel Standard version without accessories**

**HUS – Antriebe GmbH**  
Am Senneberg 7  
D – 56472 Nisterau

Phone 02661 – 6692  
Fax: 02661 – 6609

Internet <http://www.hus-antriebe.de>  
E-Mail [service@hus-antriebe.de](mailto:service@hus-antriebe.de)